




Support

If you need support, please contact us via the chat box function on our website: mrnet.us and our support team will assist you..

Model MR·NET GO Bonding Gateway

Quick overview

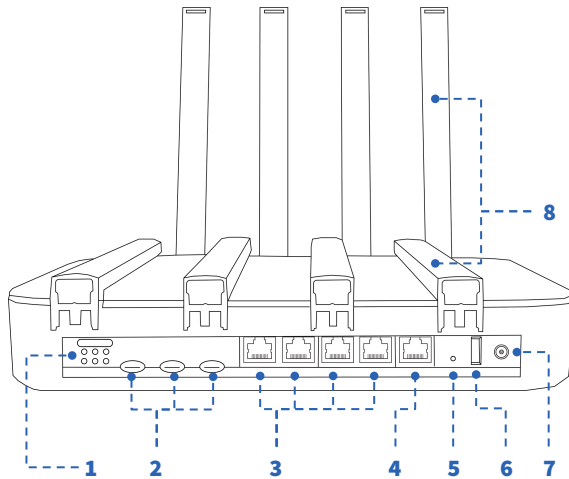

- 1. LED indicators
- 2. 3 Nano SIM slots
- 3. 4 LAN ports (RJ45 input)
- 4. 1 WAN port (RJ45 input)
- 5. Reset button
- 6. USB port
- 7. Power DC 12V, 2.5A
- 8. Built-in antennas

Kit includes

- 1. MR·NET Bonding Gateway (Model MR.005 Go)
- 2. Power supply adapter 12V, 2.5A
- 3. Cat5 ethernet cable (3 ft)

3 SIM

Three independent LTE providers

4 LAN

100BASE-T DSL Ethernet connections

2.4/5 GHz

Wi-Fi IEEE 802.11.a/n/g 2.4GHz / 5GHz bands

How to prepare your Bonding Gateway. Step-by-step tutorial

1. Unpack your box and get the Device

Open the box and get your Bonding Gateway. Unpack it from wrapping paper. Be sure that all nano SIM cards are there.

2. Gently unfold all eight antennas to 90 degrees

Unfold all eight antennas to 90 degrees for maximum signal level. Be sure that all antennas stand straight and solid.

3. Plug-in power supply into MR·NET Bonding Gateway

Take the power supply adapter and insert it into the power DC connector. Do not plug power supply adaptor into electrical outlet yet.

4. Put MR·NET Bonding Gateway in best signal area

Find a place where you expect the cell signal in your location to be the best - usually by a window, up high, etc. Avoid metal barriers.

5. Plug DC power adaptor into 110v socket

Plug in the power supply to automatically turn on the unit (power button turns green). Be sure that power connection is stable and strong.

6. Wait up to 120 seconds for connection to be established

1-2 minutes later you should see the first light turn steady green, which means your Internet connection is established.

7. Connect your equipment to LAN ports or via Wi-Fi

Connect any existing equipment through Wi-Fi or directly to your laptop/IoT device to any of LAN ports on the Bonding Gateway

8. It's done! You are ready to roll

If you have any troubles, please feel free to let us know by calling the number listed above, or through the chat box function on our [website](http://mrnet.us).